

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
28 March 2002 (28.03.2002)

PCT

(10) International Publication Number  
**WO 02/25357 A2**

- (51) International Patent Classification<sup>7</sup>: **G02F**
- (21) International Application Number: **PCT/IB01/02733**
- (22) International Filing Date:  
19 September 2001 (19.09.2001)
- (25) Filing Language: **English**
- (26) Publication Language: **English**
- (30) Priority Data:  
0003342-3 19 September 2000 (19.09.2000) **SE**
- (71) Applicant (for all designated States except US): **BANG & OLUFSEN POWERHOUSE A/S [DK/DK]**; Peter Bangs Vej 15, DK-7600 Struer (DK).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **NIELSEN, Karsten [DK/DK]**; Dronningens Vaenge 12, 2 tr., DK-2800 Kgl Lyngby (DK).
- (74) Agent: **AWAPATENT AB**; Box 11394, S-402 28 Göteborg (SE).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AT (utility model), AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, CZ (utility model), DE, DE (utility model), DK, DK (utility model), DM, DZ, EC, EE, EE (utility model), ES, FI, FI (utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (utility model), SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Declaration under Rule 4.17:**

— of inventorship (Rule 4.17(iv)) for US only

[Continued on next page]

(54) Title: **CONTROLLED SELF-OSCILLATION MODULATOR AND POWER CONVERSION SYSTEM USING SUCH A MODULATOR**

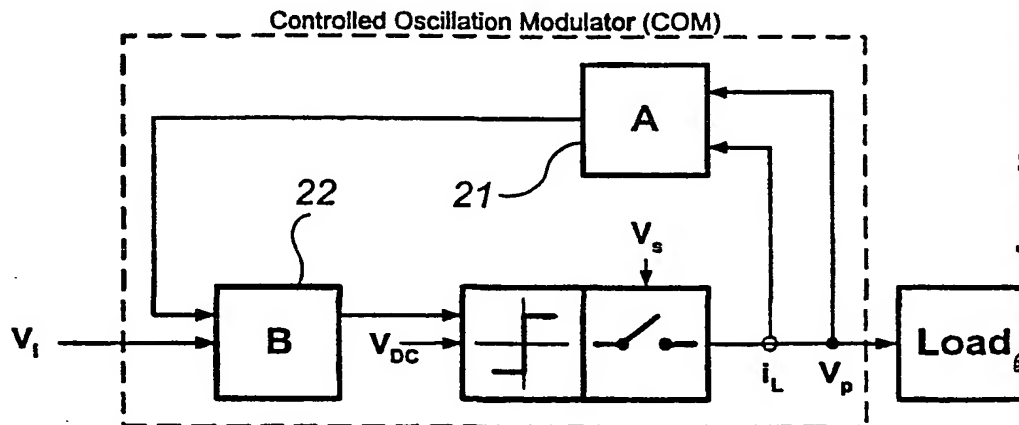

(57) Abstract: A controlled oscillation modulator includes a comparator and a power amplification stage for pulse modulation, and a higher order oscillating loop comprising first feedback means (21) and first forward means (22) securing stable oscillating conditions. The modulator is characterized by current measurement means, arranged to measure a value ( $i_L$ ) of a current supplied by said power amplification stage to a load (5) connected to the modulator, said measured value being supplied to said first feedback means (21) has a transfer function adapted to generate said first feedback signal based on said measured value ( $i_L$ ), and said first forward means (21) has a transfer function adapted to generate said modulating signal based on said first feedback means and an input signal ( $V_i$ ). Application are general DC-DC and DC-AC power conversion with inductive loading. In a preferred emplements a precision transconductance amplifier by a current feedback. In a futher preferred embodiment the controlled oscillation modulator implements a precision voltage power amplifier for audio amplification purposes.

WO 02/25357 A2

Best Available Copy



**Published:**

— without international search report and to be republished  
upon receipt of that report

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

CONTROLLED SELF-OSCILLATION MODULATOR AND POWER  
CONVERSION SYSTEM USING SUCH A MODULATOR

Technical field

This invention relates to a self-oscillating modulator, comprising a comparator and a power  
5 amplification stage for pulse modulation, and a higher order oscillating loop comprising first feedback means and first forward means securing stable oscillating conditions, wherein said first feedback means is arranged to supply a first feedback signal to said first forward  
10 means, which is arranged to provide a modulating signal to said comparator.

The invention also relates to a switching power conversion system, such as DC-AC (e.g. audio  
15 amplification), DC-DC or AC-AC conversion systems using such a modulator. The invention may advantageously be used for improved power conversion in any system, in particular precision DC-AC conversion systems as high efficiency audio amplification.

20 Technical background

The pulse modulator is a central element of any power conversion system. Most switching power converters are based on Pulse Width Modulation (PWM) as a means to control efficient conversion between domains (DC or AC).

25 A typical power converter includes a PWM modulator, a switching power conversion stage, a filter and a control system. A prior art system of this type is described in US Patent. No. 4724396 (1988) and by Mr. Attwood in Journal of the AES, Nov. 1983. p. 842-853.  
30 However, PWM has a range of shortcomings also well known to the art, mainly due to the implementation of the carrier generation. This limits the system bandwidth and

complicates design. Also, a stable and robust control system design is difficult.

In order to overcome these drawbacks, a controlled self-oscillating modulator (COM) was introduced in the applicant's international patent application  
5 PCT/DK97/00497. The disclosed modulator eliminates the need of a carrier generator, with a range of advantages, described in detail in said document.

A problem with this technique is that voluminous and  
10 expensive power components are needed, in order to compensate for filter inductor currents. Further, problems may occur when the modulator is connected to a reactive load or open load, requiring e.g. RC-Zobel compensation. The COM technology is also difficult to  
15 implement in systems with greater bandwidth. In short, it could be said that even though the COM approach overcomes some of the disadvantages of the conventional PWM technology, some limitations are still present.

## 20 Objects of the invention

Accordingly, a primary object of the invention has been to provide a superior modulation technique in switching power conversion systems that overcomes fundamental problems related to conventional techniques.

25 A second object has been to provide a pulse modulation in general power conversion systems that provides significant advantages in performance, topological simplification, improved robustness and stability compared to prior art.

30

## Summary of the invention

These objects are achieved by a controlled self-oscillating modulator (COM) of the type mentioned above, characterized by current measurement means, arranged to  
35 measure a value of a current supplied by said power amplification stage to a load connected to the modulator, said measured value being supplied to said first feedback

means, wherein said first feedback means has a transfer function adapted to generate said first feedback signal based on said measured value, and said first forward means has a transfer function adapted to generate said modulating signal based on said first feedback means and an input signal.

By measuring the current that is supplied to the load, the load control is much improved, eliminating the need of further load compensation. Also, any filter inductor currents are compensated, as the modulator acts as a powerful, wideband control system, leading to lower requirements on the power components.

As the current measurement itself implements a first order transfer function, and thus introduces a first pole in the oscillating loop, this leads to a simplification of the design. Especially in applications where miniaturization is important, such as mobile, personal audio equipment, this is an important advantage over prior art.

The COM according to the invention thus aims to combine the advantages of the COM technology with the advantages of current controlled PWM technology, resulting in a system presenting the following features:

- The system is inherently unstable
- No carrier generator is needed, saving components.
- The power supply variable  $V_s$  is eliminated from the effective loop transfer function.
- The system acts as a wideband control system.
- Clean modulation (no feedback noise and poor carrier signal).
- A controllable variable switching frequency for improved efficiency and EMI.

This makes the modulator according to the invention very suitable in all types of precision DC-AC conversion applications, such as audio applications.

The modulator preferably includes means for feedback of an output voltage from said amplification stage. This enables a very compact design combining modulation and control system surrounding the central power conversion

stage. Whereas combined voltage and current feedback PWM systems are well known in the art, said COM based two loop topology is an advantageous improvement and new to the art.

5       According to an embodiment of the voltage feedback, the first feedback means is connected to said output voltage, and the first feedback means is adapted to generate said first feedback signal based on said current value and said voltage. This can be an advantageous way  
10   to implement the double feedback, reducing the number of components.

      According to another embodiment of the voltage feedback, the modulator comprises a second feedback means connected to said output voltage, and adapted to generate  
15   a second feedback signal, and a second forward means, adapted to supply said first forward block with said input signal based on said second feedback signal and a second signal. Although this implementation is somewhat more complex, it can be advantageous in some  
20   applications, where it is desirable to let the current measurement and the voltage feedback with different transfer functions.

      The power amplification stage can comprise an output filter, and the second feedback means can then be  
25   connected to an output from said output filter. This permits a first filtering of the voltage before it is fed back in the feedback path.

      In a preferred embodiment, the means for current measurement is adapted to implement protection functions  
30   as limitations of peak current and long term current.

      The controlled oscillation modulator can advantageously be used in precision voltage or current controlled DC-AC conversion as e.g. power amplifiers for audio use.

Brief description of the drawings

Preferred embodiments of the present invention will be further described in the following, with reference to the appended drawings.

5 Fig. 1 shows a prior art controlled oscillating modulator based on voltage feedback.

Fig. 2 shows a block diagram of a first embodiment of the invention.

10 Fig. 3 shows a block diagram of a second embodiment of the invention.

Fig. 4 shows a block diagram of a third embodiment of the invention.

Detailed description of the preferred embodiments

15 The basic principle of the COM according to prior art is illustrated in the general block diagram of Fig. 1. As it uses voltage feedback, it will be referred to as VCOM. An input voltage  $V_i$  is supplied to a forward block 2, also supplied by a feedback block 1, to derive and  
20 process error information. The compensated signal  $V_b$  is supplied to a non-hysteresis comparator 3, which is referenced to a voltage  $V_{DC}$ , preferably a DC voltage. The resulting pulse modulated signal is power amplified in a switching power conversion stage 4 supplied by  $V_s$ ,  
25 generation the power pulse signal  $V_p$ , said pulse signal driving an inductive load 5.

The block 1 processes output information from the output voltage  $V_p$  and controls the overall transfer function characteristics of the system. The controlled  
30 oscillation modulator is characterized by at least two poles total in the blocks 1 and 2, in combination with the propagation delay of the modulator and power stage generating a sinusoidal like modulating signal  $V_b$  to be compared with  $V_{DC}$ . Under these presumptions, the system  
35 realizes an oscillating system at the frequency of positive feedback. The block 1 is implemented to control

the overall transfer function characteristics from  $V_i$  to the output variables.

Assuming, that a constant gain  $K$  is desired over a certain bandwidth, it proves expedient with the following transfer functions:

$$A(s) = \frac{1}{K} \frac{1}{\tau_1 s + 1} \frac{1}{\tau_o s + 1} \quad B(s) = K_B \frac{\tau_{zB} s + 1}{\tau_{pB} s + 1} \frac{1}{\tau_o s + 1} \quad (1)$$

In this illustrative example, the A-block 1 having a first order characteristic with a pole  $s = -1/\tau_1$  placed at lower frequencies, generally more than a decade below the oscillation frequency, the oscillation conditions are comfortably determined by  $\tau_o$ , with the two poles placed at  $s = -1/\tau_o$ . The requirements for a " Controlled Oscillation Modulation (COM) " is:

$$|L(j\omega_o)| = |K_p A(j\omega_o) B(j\omega_o)| = 1 \quad \angle L(j\omega_o) = 180^\circ \quad (2)$$

where the desired system oscillation frequency is  $\omega_o$ . Hence, in this preferred example, the condition for controlled oscillation is:

$$|K_B K_p| = K \frac{\omega_o \tau_{p1} \tau_{pB}}{2\tau_{zB}} \quad (3)$$

The VCOM system will be forced to oscillate at  $\omega_o$  due to the non-linear gain characteristic of the comparator and a switching power stage.

25

As a preferred embodiment of the invention consider the system in fig. 2. In this modulator, it is the value of the current  $i_L$  delivered to the load that is used as input in the generation of a modulating signal  $V_b$ . The current  $i_L$  is measured with a current measurement means 6, arranged after the amplification stage 4.

30



Advantageous transfer functions of the blocks 11 and 12 in this case are:

$$A(s) = Z_m \frac{1}{\tau_o s + 1} \quad B(s) = K_B \frac{\tau_{zB} s + 1}{\tau_{pB} s + 1} \frac{1}{\tau_o s + 1} \quad (4)$$

5 Assuming that the current controlled COM system, henceforth referred to as CCOM, is loaded by a second order (L,C) filter for demodulation, the loop transfer function is:

$$\begin{aligned} G_C(s) &= A(s)B(s)G_O(s) \\ &= K_B \frac{\tau_{zB} s + 1}{\tau_{pB} s + 1} \cdot \frac{K_P(\hat{v}_b)}{L} \frac{s + \frac{\omega_o}{Q_o}}{s^2 + \frac{\omega_o}{Q_o} s + \omega_o^2} Z_m \frac{1}{(\tau_o s + 1)^2} \end{aligned} \quad (5)$$

10

Where:

$$\omega_o = \frac{1}{\sqrt{LC}}, \quad Q_o = R \sqrt{\frac{C}{L}} = RC\omega_o \quad (6)$$

15 Hence, the condition for controlled oscillation in the CCOM system is:

$$|K_B K_P| = \frac{L}{Z_m} \frac{\omega_o \tau_{pB}}{2\tau_{zB}} \quad (7)$$

Example parameter values for the CCOM system are:

| Parameter                          | Nom. Frequency<br>(rel. to bandwidth) | Audio Case |
|------------------------------------|---------------------------------------|------------|
| $f_{zB} = \frac{1}{2\pi\tau_{zB}}$ | 2                                     | 40kHz      |
| $f_{pB} = \frac{1}{2\pi\tau_{pB}}$ | 0.2                                   | 4kHz       |
| $f_o$                              | 20                                    | 400kHz     |

Those skilled in the art will appreciate that many well known ways could be used to implement the CCOM system with alternative parameters and alternative  
 5 placement of the poles. Thus, the example is only illustrative and demonstrating a simple broad band transconductance amplifier system with a constant in-band transconductance of  $\frac{1}{Z_m}$ .

The CCOM modulator illustrated in fig 2 can  
 10 advantageously be combined with the VCOM according to prior art, and two preferred embodiments of this combination are illustrated in fig 3 and 4.

This combined modulator may advantageously be implemented in a general purpose high performance DC-AC  
 15 conversion system, with a 2:nd order demodulation filter and a global voltage loop.

In fig 3, the transfer function A' of feedback block 21 is adapted to receive a voltage feedback from the amplification stage 4 as well as the measured current  
 20 value  $i_L$ . Suitable adjustment of the transfer function B' of forward block 22 is also made.

Another example is the broadband, constant gain power amplifier of fig 4, where two additional blocks 31 and 32 have been introduced. The amplifier thus comprises  
 25 a CCOM 30 according to fig 2, surrounded by a voltage feedback path 33. The voltage signal  $V_o$  is taken after an output filter 34, and is connected to the block 31. The

generated signal  $V_o$  is then supplied to the block 32, also supplied with the input voltage  $V_i$ . It is the output from block 32 which is supplied to the forward block 11 of the CCOM 30, together with the signal  $V_a$  from the feedback block 12. Preferred transfer functions of the blocks 31 and 32 are:

$$C(s) = \frac{1}{K} \frac{1}{\tau_{pC}s + 1} \quad D(s) = K_D \frac{\tau_{zD}s + 1}{\tau_{pD}s + 1} \quad (8)$$

By adjusting  $K_D$  the desired voltage loop bandwidth,  $f_v$ , is easily implemented. Example parameters are:

| Parameter                          | Nom. Frequency<br>(rel. To bandwidth) | Audio Case |
|------------------------------------|---------------------------------------|------------|
| $f_{zD} = \frac{1}{2\pi\tau_{zD}}$ | 2                                     | 40kHz      |
| $f_{pD} = \frac{1}{2\pi\tau_{pD}}$ | 0.2                                   | 4kHz       |
| $f_v$                              | 5                                     | 100kHz     |

Those skilled in the art will appreciate that many well-known ways could be used to implement the transfer functions in the blocks of the COM system. The system gain  $K$  is maintained constant within the bandwidth of the system.

An alternative advantageous embodiment of the invention is a two-pole compensation of the COM system, such that the in band loop gain is steeper (although less than -12db/octave) for improved feedback compensation by the combined COM modulator and feedback control system. Those skilled in the art will understand that this can e.g. be implemented in the B-block.

Other embodiments of the invention include input filtering and limitation section to control the transfer function and to provide improved clipping characteristics, which may advantageously be of the soft clipping type. In addition the limiter will keep the oscillator running and the control loop in operation. A third advantage of a properly implemented limiter function is that there will not be and lag during recovery from overload. Those skilled in the art will appreciate that many well-known ways to implement such a limiting function.

## CLAIMS

1. Controlled self-oscillating modulator,  
comprising a comparator and a power amplification stage  
5 for pulse modulation, and a higher order oscillating loop  
comprising first feedback means and first forward means  
securing stable oscillating conditions, wherein said  
first feedback means is arranged to supply a first  
feedback signal to said first forward means, which is  
10 arranged to provide a modulating signal to said  
comparator, characterized by  
current measurement means, arranged to measure a  
value of a current supplied by said power amplification  
stage to a load connected to the modulator, said measured  
15 value being supplied to said first feedback means,  
wherein said first feedback means has a transfer  
function adapted to generate said first feedback signal  
based on said measured value, and said first forward  
means has a transfer function adapted to generate said  
20 modulating signal based on said first feedback signal and  
an input signal.
2. Controlled self-oscillating modulator according  
to claim 1, further including means for feedback of an  
25 output voltage from said amplification stage.
3. Controlled self-oscillating modulator according  
to claim 2, wherein said first feedback means is  
connected to said output voltage, said first feedback  
30 means being adapted to generate said first feedback  
signal based on said current value and said voltage.
4. Controlled self-oscillating modulator according  
to claim 2, further comprising  
35 second feedback means connected to said output  
voltage, adapted to generate a second feedback signal,  
and

second forward means, adapted to supply said first forward block with said input signal based on said second feedback signal and a second signal.

5        5.    Controlled self-oscillating modulator according to claim 4, wherein said power amplification stage comprises an output filter, and wherein said second feedback means is connected to an output from said output filter.

10

6.    Controlled self-oscillating modulator according to any of the preceding claims, further comprising limiter means to control the modulation depth.

15

7.    Controlled self-oscillating modulator according to claim 6, wherein said means for current measurement is adapted to implement protection functions as limitations of peak current and long term current.



20

8.    Power conversion system, implementing a modulator according to any of the preceding claims.

9.    Power conversion system according to claim 8, used to drive an electrodynamic transducer load directly.

25

1/2

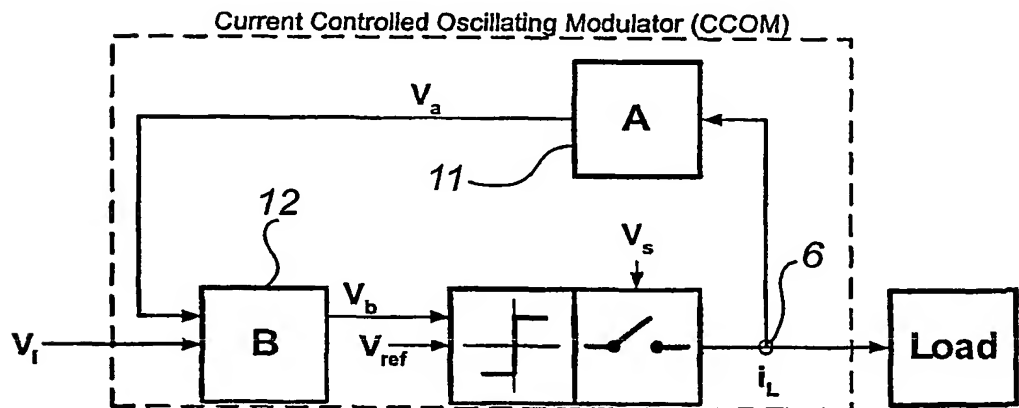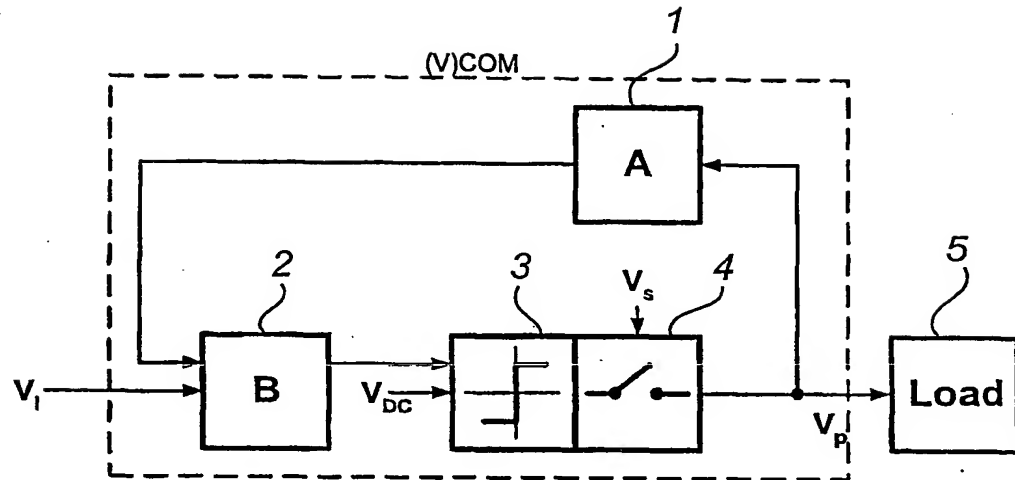

2/2

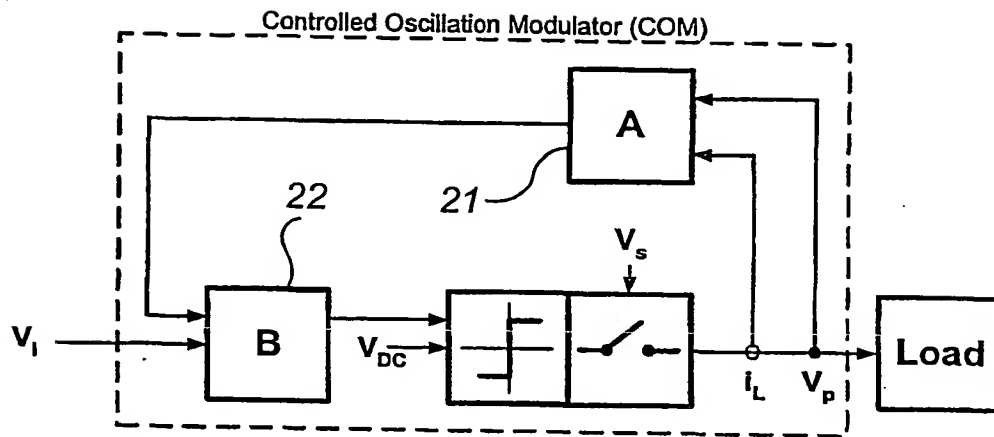


Fig. 3

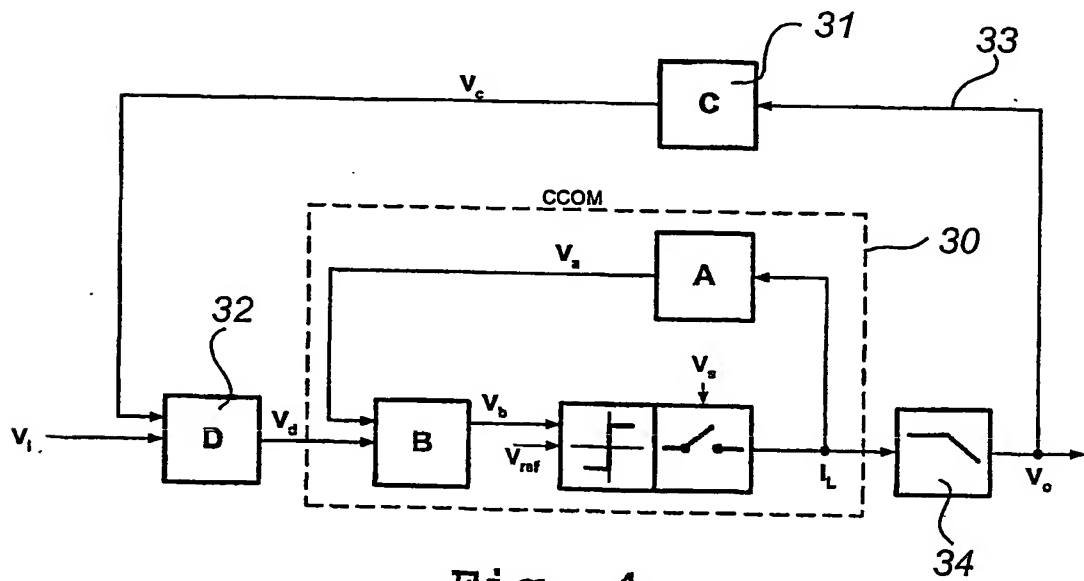


Fig. 4



(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
28 March 2002 (28.03.2002)

PCT

(10) International Publication Number  
**WO 02/025357 A3**

(51) International Patent Classification<sup>7</sup>: H03F 3/217, 1/32

[DK/DK]; Dronningens Vaenge 12, 2 tr., DK-2800 Kgl  
Lyngby (DK).

(21) International Application Number: PCT/IB01/02733

(74) Agent: AWAPATENT AB; Box 11394, S-402 28 Göte-  
borg (SE).

(22) International Filing Date:  
19 September 2001 (19.09.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
0003342-3 19 September 2000 (19.09.2000) SE

(81) Designated States (*national*): AE, AG, AL, AM, AT, AT  
(utility model), AU, AZ, BA, BB, BG, BR, BY, BZ, CA,  
CH, CN, CO, CR, CU, CZ, CZ (utility model), DE, DE  
(utility model), DK, DK (utility model), DM, DZ, EC, EE,  
EE (utility model), ES, FI, FI (utility model), GB, GD, GE,  
GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ,  
LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN,  
MW, MX, MZ, NO, NZ, PH, PL, PT, RO, RU, SD, SE, SG,  
SI, SK, SK (utility model), SL, TJ, TM, TR, TT, TZ, UA,  
UG, US, UZ, VN, YU, ZA, ZW.

(71) Applicant (*for all designated States except US*): BANG &  
OLUFSEN POWERHOUSE A/S [DK/DK]; Peter Bangs  
Vej 15, DK-7600 Struer (DK).


(84) Designated States (*regional*): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian  
patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European  
patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,  
IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF,

(72) Inventor; and

(75) Inventor/Applicant (*for US only*): NIELSEN, Karsten

[Continued on next page]

(54) Title: CONTROLLED SELF-OSCILLATION MODULATOR

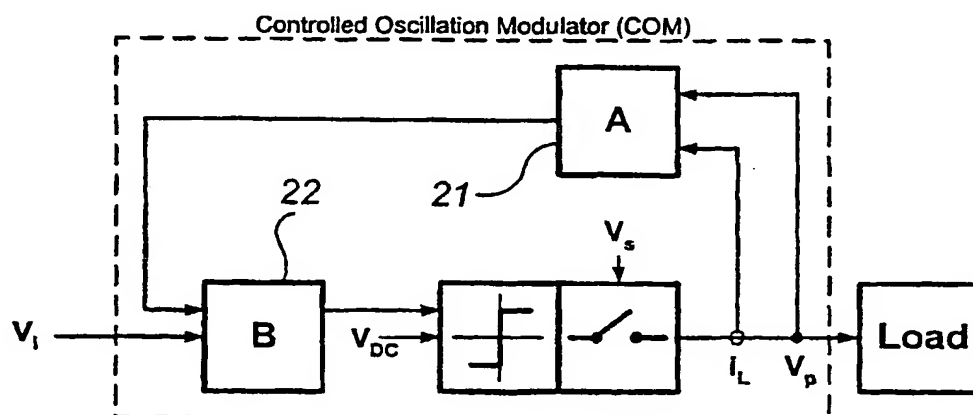

(57) Abstract: A controlled oscillation modulator includes a comparator and a power amplification stage for pulse modulation, and a higher order oscillating loop comprising first feedback means (21) and first forward means (22) securing stable oscillating conditions. The modulator is characterized by current measurement means, arranged to measure a value ( $i_L$ ) of a current supplied by said power amplification stage to a load (5) connected to the modulator, said measured value being supplied to said first feedback means (21) has a transfer function adapted to generate said first feedback signal based on said measured value ( $i_L$ ), and said first forward means (21) has a transfer function adapted to generate said modulating signal based on said first feedback means and an input signal ( $V_i$ ). Application are general DC-DC and DC-AC power conversion with inductive loading. In a preferred implements a precision transconductance amplifier by a current feedback. In a further preferred embodiment the controlled oscillation modulator implements a precision voltage power amplifier for audio amplification purposes.

WO 02/025357 A3



CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(88) Date of publication of the international search report:

4 July 2002

**Declaration under Rule 4.17:**

— *of inventorship (Rule 4.17(iv)) for US only*

**Published:**

— *with international search report*

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/IB 01/02733

## A. CLASSIFICATION OF SUBJECT MATTER

IPC7: H03F 3/217, H03F 1/32

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: H03F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-INTERNAL, WPI DATA, PAJ, INSPEC

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

| Category* | Citation of document, with indication, where appropriate, of the relevant passages   | Relevant to claim No. |
|-----------|--|-----------------------|
| A         | WO 9844626 A2 (NIELSEN, KARSTEN), 8 October 1998<br>(08.10.98), page 2, line 36 - page 4, line 4,<br>figure 3, abstract<br>--          | 1-9                   |
| A         | US 4531096 A (KENJI YOKOYAMA), 23 July 1985<br>(23.07.85), column 2, line 22 - line 47, figure 6,<br>abstract<br>--                    | 1-9                   |
| A         | WO 9715170 A1 (MITEL SEMICONDUCTOR, INC.),<br>24 April 1997 (24.04.97), page 1, line 27 - page 2,<br>line 34, figure 1, abstract<br>-- | 1-9                   |

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

\* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&amp;" document member of the same patent family

Date of the actual completion of the international search

9 April 2002

Date of mailing of the international search report

16-04-2002

Name and mailing address of the ISA:

Swedish Patent Office

Box 5055, S-102 42 STOCKHOLM

Facsimile No. +46 8 666 02 86

Authorized officer

Antonio Farieta/MN

Telephone No. +46 8 782 25 00

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/IB 01/02733

## C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

| Category* | Citation of document, with indication, where appropriate, of the relevant passages   | Relevant to claim No. |
|-----------|--|-----------------------|
| A         | WO 9819391 A2 (BANG & OLUFSEN A/S), 7 May 1998<br>(07.05.98), page 4, line 2 - page 5, line 34,<br>figure 5, abstract<br><br>--<br>----- | 1-9                   |

# INTERNATIONAL SEARCH REPORT

Information on patent family members

28/01/02

International application No.

PCT/IB 01/02733

| Patent document<br>cited in search report |         |    | Publication<br>date | Patent family<br>member(s) |              | Publication<br>date |
|---|---------|----|---------------------|----------------------------|--------------|---------------------|
| WO  | 9844626 | A2 | 08/10/98            | AU                         | 730339 B     | 01/03/01            |
|   |         |    |                     | AU                         | 6495098 A    | 22/10/98            |
|   |         |    |                     | CN                         | 1251697 T    | 26/04/00            |
|   |         |    |                     | EP                         | 1042865 A    | 11/10/00            |
|   |         |    |                     | JP                         | 2001517393 T | 02/10/01            |
| -----                                     |         |    |                     |                            |              |                     |
| US  | 4531096 | A  | 23/07/85            | JP                         | 1602887 C    | 29/03/91            |
|   |         |    |                     | JP                         | 2026811 B    | 13/06/90            |
|   |         |    |                     | JP                         | 59067719 A   | 17/04/84            |
| -----                                     |         |    |                     |                            |              |                     |
| WO  | 9715170 | A1 | 24/04/97            | AU                         | 7447696 A    | 07/05/97            |
|   |         |    |                     | EP                         | 0856239 A    | 05/08/98            |
|   |         |    |                     | US                         | 5815581 A    | 29/09/98            |
| -----                                     |         |    |                     |                            |              |                     |
| WO  | 9819391 | A2 | 07/05/98            | AU                         | 734813 B     | 21/06/01            |
|   |         |    |                     | AU                         | 4772897 A    | 22/05/98            |
|   |         |    |                     | CN                         | 1235711 A    | 17/11/99            |
|   |         |    |                     | EP                         | 0935846 A    | 18/08/99            |
|   |         |    |                     | JP                         | 2001503575 T | 13/03/01            |
|   |         |    |                     | US                         | 6297692 B    | 02/10/01            |
| -----                                     |         |    |                     |                            |              |                     |

THIS PAGE BLANK (USPTO)

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

THIS PAGE BLANK (333)